


To whom it may concern;

Product Specification

1. Product Name: #246W Flame-retardant harness tape

2. Adhesive Tape Structure

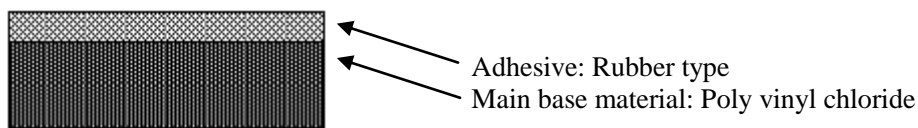

3. Specifications

| Nominal Dimension | | |
|-------------------|------------|------------|
| Thickness (mm) | Width (mm) | Length (m) |
| 0.11 | 19 / 25 | 25 |

4. Standard Color

| | | | |
|-------|---|---|---|
| Black | - | - | - |
|-------|---|---|---|

5. Performance Data

| Property | Specification | Testing Method |
|--|-----------------------------------|--------------------------|
| Thickness (mm) | 0.11 ± 0.02 | JIS Z 0237 |
| Width (mm) | 19 ± 1.0 | JIS Z 0237 |
| | 25 ± 1.5 | |
| Length (m) | 25 or larger | JIS Z 0237 |
| Adhesive strength at 180°peeling angle N/10 mm | 0.49 or larger | JIS Z 0237 |
| Tensile strength N/10 mm | 13.4 or larger | JIS Z 0237 |
| Elongation % | 100 or larger | JIS Z 0237 |
| Volume resistivity MΩ·cm | 1.0 × 10 ⁶ or larger | JIS C 2107-Appendix JA.2 |
| Withstand voltage | Withstanding at 1,500V x 1 minute | JIS C 2107-Appendix JA.1 |
| Flame retardance (Oxygen index) | 23.5 or larger | JIS K 7201 |

6. Instructions for Use and Storage (Precautions)

- When you handle or store product, mind to avoid from direct sunlight or storage in high temperature place.
- Please use product after cleaning and removing stain, dust, moisture or oils on the surface of product.
- When you use product, mind to test the suitability of product for particular purpose or its safety beforehand by yourself and make sure on your own responsibility.